



Remove the body from the chassis board by undoing the wheel bolts. You may need to slip a blunt knife all the way around in-between as the old cover sometimes becomes stuck to the board.

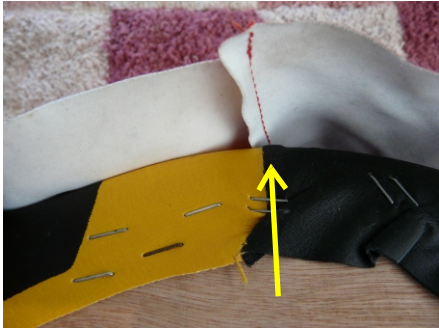


Locate new cover over existing seam and staple with a hand tacker. → 

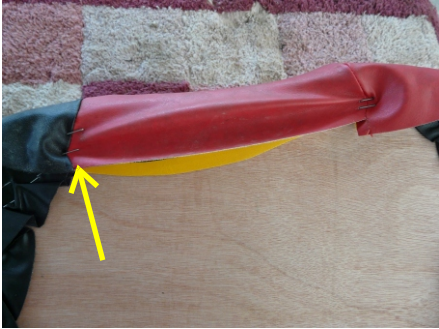

Stretch and do likewise for the other seam



Stretch the cover across the body ensuring there are no wrinkles

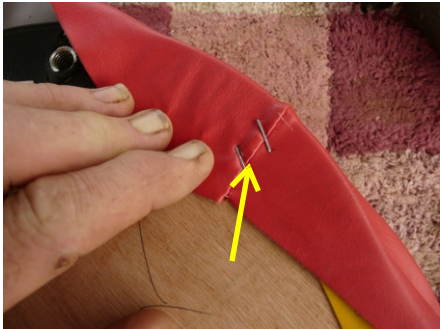


Fix with two staples



Stretch the last seam into place



And fix with two staples

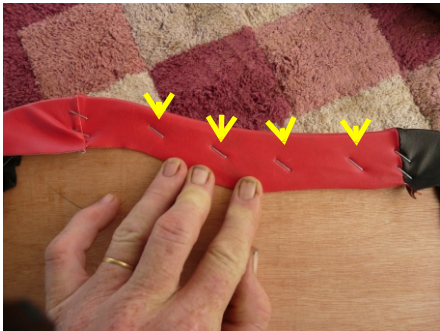


Pull the waist section tight and staple. Do likewise to the other side




Pull and staple rear centre



Pull and staple front centre

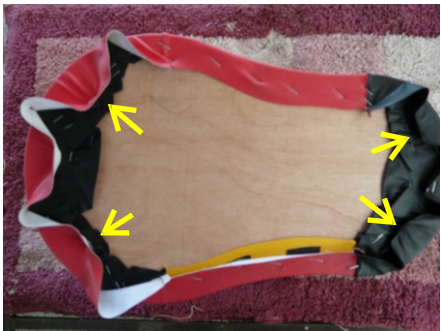

Pull and staple in-between

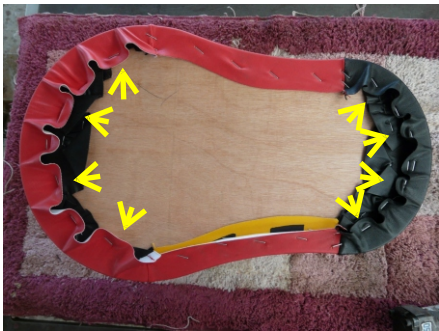

Then in-between again



Finish off in-between again